


Wiring

Having correctly identified the wiring from your existing light fitting, connect to the quick fit connection block in the following way:

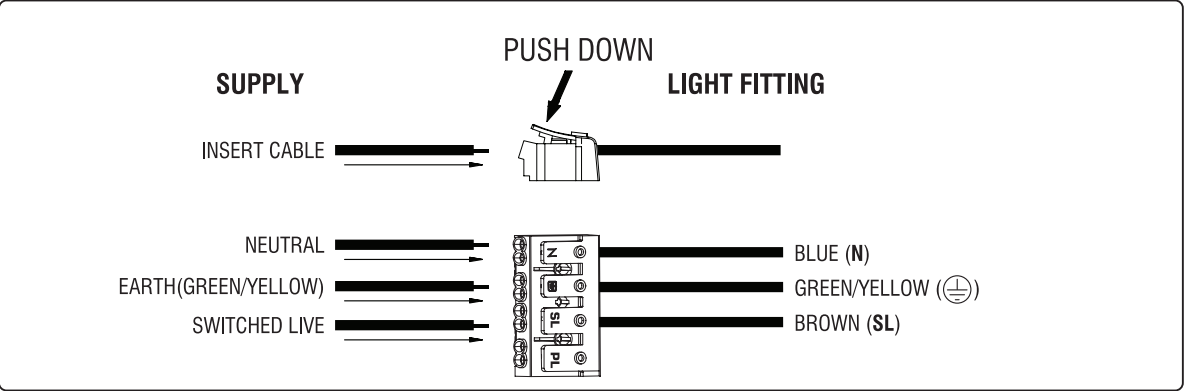

Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

Technical data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 50W/30W LED (SMD) CCT, 3000/4000/6000K This product contains a light source of energy efficiency class **D**.

 Non-replaceable light source


 Replaceable control gear by a professional


 Conformity with all relevant UKCA Directive requirements.

 Conformity with all relevant EC Directive requirements.

 The is Class 1 product must be earthed.

 Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

 This product is not suitable for dimming.

 Caution! Risk of electric shock!

 This product is for indoor use only.

Care and Safety


We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
For your safety, always switch off the power supply before cleaning.
Always disconnect the product from mains at least 10 minutes allowing to cool down before any maintenance or adjustment.

For further information, please visit <https://www.lighting-info.co.uk/121113>

Instruction manual

Linus

121113, 121114

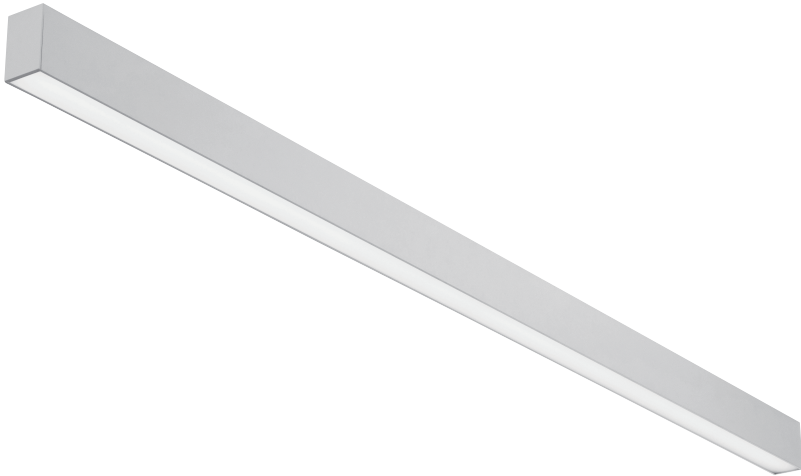

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This light fitting is Class 1 product, must be connected to Earth. Please read these instructions carefully before commencing any work. This unit must be fitted by a competent and qualified electrician. Install in accordance with the IET Wiring regulations and current Building Regulations. Check the pack and make sure you have all the parts listed. To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If replacing an existing fitting, make a careful note of the connections. If replacing an existing fitting, make a careful note of the connections. Never put anything on the product or hang anything on any part of this product. Never use the terminal cables to bear the product weight. Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Layout

Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between light fitting. Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged. This unit is suitable for indoor use only. The mains supply cable must have a minimum cross section area of 1.0mm². Cables must be protected using suitable conduit or trunking.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires. Note that the switch is turned off before installation. Ensure the ceiling is capable of holding the weight of the products. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard. The chosen location of your fitting should allow for the product to be securely mounted and anchored to a solid surface e.g. concrete, brick or a joist—do not fix directly onto paneling, plasterboard etc. Do not attach to surfaces which are damp, freshly painted or otherwise electrically conductive (e.g. metallic surfaces). Prepare installation tools and accessories for mounted

Suspended mounted

1

Mark the position of the fixing holes and drill the holes.

2

Install the suspension kit into the ceiling.

3

Remove the plate fixed on the lamp.

4

Hang the hooks into the holes on the plate in place. Pull the hanging rope to adjust the length (Min.100mm - Max. 2000mm).

5

Pull the supply cable through entry hole on the plate then connect to the quick fit terminal block as detailed wiring diagram.

6

The wattage and colour is changeable by using the Watt Switch and CCT Switch correspondingly. Choose your preferred wattage and colour by sliding the switches in the driver. **Note: Before you change the wattage or colour, please turn off the power for safety.**

7

Push back the plate into the lamp tightly.

8

Range of suspension length (Min.100mm - Max. 2000mm). Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Tools (not supplied): Drill, Screwdriver, Tape Measure.

Suspension kit (supplied): x1 Cable, x2 Hooks, x2 Screws.

Ceiling mounted

1

Mark the position of the fixing holes and drill the holes.

2

Remove the back plate fixed on the lamp to install it in the ceiling with the plugs and screws.

3

Hang the safety rope into the hole on the back plate then pull the supply cable through the empty hole.

4

Remove the plate fixed on the lamp. Connect the supply cable to the quick fit terminal block as detailed wiring diagram.

5

The wattage and colour is changeable by using the Watt Switch and CCT Switch correspondingly. Choose your preferred wattage and colour by sliding the switches in the driver. **Note: Before you change the wattage or colour, please turn off the power for safety.**

6

Push back the plate into the lamp tightly.

7

Adjust the position and push the lamp into the back plate tightly.

8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Straight Link

1

Remove the plate 1 fixed on the lamp.

2

Slide the plate 2 on the lamp.

3

Remove the screws to take off the end caps fixed on the lamp and set aside to use for fixing the connection plate between the two lamps in the installa later.

4

Connect one lamp to the another lamp. Insert the connection board to connect with screws.

5

Push back the plate into the the lamp correspondingly.

6

Install the lighting fixtures refet to the installation details of suspended mounted. Range of suspension length (Min.100mm - Max. 2000mm). Replace fuse or circuit breaker and switch on. Your light is now ready for use.